4GX
4 ” SUBMERSIBLE MOTORS

AISI 316



CE

4” Asynchronous two-poles submersible motor, **made in full AISI 316 stainless steel.** Cooling and lubrication of the thrust bearing assembly and carbon bushes is provided by a **mixture of water and glycol.** Squirrel-cage rotor mounted on Kingsbury self-centring thrust bearing. Stator housed in an airtight stainless steel casing (canned-type) with both flangs and shell in AISI 316L stainless steel. Removable cable connector to allow fast and easy maintenance. The cable is certified ACS, WRAS and KTW. Motor suitable for use with variable frequency drive (30 Hz – 50 Hz). Mechanical seal in silicon/carbide. Capacitor and manually resettable overload protection located in the electric panel that can be supplied separately for the single-phase 50 Hz version. Overload protection must be provided by user for the three-phase version.


Flanging: NEMA - 4”
Protection level: IP 68
Insulation class: F
Voltage:
single-phase 220-230 V / 50 Hz
Three-phase 400 V / 50 Hz - 230 V / 50 Hz
Equipped with cable
1,7 m for motor power up to 2,2 kW
2,7 m for motor power up to 3 kW
3,5 m for motor power of 7,5 kW

tesla submersible motors

TECHNICAL DATA

MODEL	CODE	P2 (HP)	P2 kW	VOLTAGE 50 Hz	IN (A)	Is/In	Cs/Cn	P1 (W)	N (min^{-1})	Cos φ	η %	C (μF)	CABLE	
													Ø mm^2	LC (m)
4GX - 0,37 KW - 230 V - M	**60141577**	0,5	0,37	1x230 V ~	3,3	2,7	0,69	740	2820	0,97	50	16	4x1,5	1,7
4GX - 0,55 KW - 230 V - M	**60141580**	0,75	0,55	1x230 V ~	4,6	3,3	0,68	1000	2820	0,94	56	20	4x1,5	1,7
4GX - 0,75 KW - 230 V - M	**60141584**	1	0,75	1x230 V ~	6,2	3,2	0,66	1300	2820	0,92	58	25	4x1,5	1,7
4GX - 1,1 KW - 230 V - M	**60141590**	1,5	1,1	1x230 V ~	8,6	3,6	0,68	1820	2830	0,90	62	35	4x1,5	1,7
4GX - 1,5 KW - 230 V - M	**60141593**	2	1,5	1x230 V ~	11	3,7	0,62	2320	2830	0,91	65	40	4x1,5	1,7
4GX - 2,2 KW - 230 V - M	**60141596**	3	2,2	1x230 V ~	16	3,1	0,6	3460	2810	0,89	65	60	4x1,5	1,7
4GX - 0,37 KW - 400 V - T	**60141578**	0,5	0,37	3x400 V ~	1,4	3,8	3	710	2820	0,66	53	-	4x1,5	1,7
4GX - 0,37 KW - 230 V - T	**60141579**	0,5	0,37	3x230 V ~	2,7	3,7	3	710	2820	0,66	53	-	4x1,5	1,7
4GX - 0,55 KW - 400 V - T	**60141581**	0,75	0,55	3x400 V ~	1,9	4,2	3,1	920	2830	0,72	60	-	4x1,5	1,7
4GX - 0,55 KW - 230 V - T	**60141582**	0,75	0,55	3x230 V ~	3,3	4,2	3,1	920	2830	0,72	60	-	4x1,5	1,7
4GX - 0,75 KW - 400 V - T	**60141586**	1	0,75	3x400 V ~	2,4	5,0	3,2	1190	2830	0,73	63	-	4x1,5	1,7
4GX - 0,75 KW - 230 V - T	**60141589**	1	0,75	3x230 V ~	4,1	5,1	3,2	1190	2830	0,72	63	-	4x1,5	1,7
4GX - 1,1 KW - 400 V - T	**60141591**	1,5	1,1	3x400 V ~	3,4	4,1	3,3	1720	2830	0,76	64	-	4x1,5	1,7
4GX - 1,1 KW - 230 V - T	**60141592**	1,5	1,1	3x230 V ~	5,7	4,2	3,3	1720	2830	0,72	64	-	4x1,5	1,7
4GX - 1,5 KW - 400 V - T	**60141594**	2	1,5	3x400 V ~	4,4	4,3	3,4	2200	2830	0,72	68	-	4x1,5	1,7
4GX - 1,5 KW - 230 V - T	**60141595**	2	1,5	3x230 V ~	7,6	4,3	3,4	2200	2830	0,72	68	-	4x1,5	1,7
4GX - 2,2 KW - 400 V - T	**60141597**	3	2,2	3x400 V ~	5,9	4,4	3,2	3170	2820	0,78	71	-	4x1,5	1,7
4GX - 2,2 KW - 230 V - T	**60141598**	3	2,2	3x230 V ~	10,2	4,4	3,2	3170	2820	0,78	71	-	4x1,5	1,7
4GX - 3,0 KW - 400 V - T	**60141607**	4	3	3x400 V ~	8,3	4,6	3,3	4050	2840	0,71	74	-	4x1,5	2,7
4GX - 3,0 KW - 230 V - T	**60141608**	4	3	3x230 V ~	14,3	4,6	3,3	4050	2840	0,71	74	-	4x1,5	2,7
4GX - 4,0 KW - 400 V - T	**60141612**	5,5	4	3x400 V ~	10	5,6	3,4	5340	2850	0,79	75	-	4x1,5	2,7
4GX - 4,0 KW - 230 V - T	**60141613**	5,5	4	3x230 V ~	17,3	5,6	3,4	5340	2850	0,79	75	-	4x2	2,7
4GX - 5,5 KW - 400 V - T	**60141614**	7,5	5,5	3x400 V ~	14	5,5	3,4	7110	2850	0,74	77	-	4x1,5	2,7
4GX - 5,5 KW - 230 V - T	**60141615**	7,5	5,5	3x230 V ~	24,2	5,5	3,4	7110	2850	0,74	77	-	4x2	2,7
4GX - 7,5 KW - 400 V - T	**60141616**	10	7,5	3x400 V ~	17,4	4,8	2,9	9520	2850	0,080	79	-	4x2	3,5

DIMENSIONS AND WEIGHTS

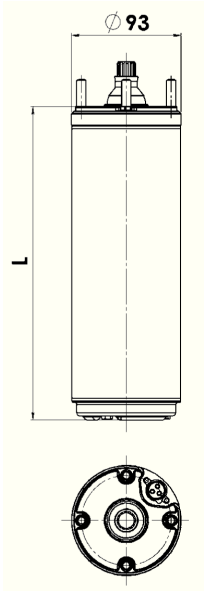

MODEL	L (mm)	Ø	WEIGHT Kg	AXIAL THRUST (N)
4GX - 0,37 KW - M	236	93	236	2000
4GX - 0,55 KW - M	266	93	266	2000
4GX - 0,75 KW - M	286	93	286	2000
4GX - 1,1 KW - M	331	93	331	2000
4GX - 1,5 KW - M	393	93	393	3000
4GX - 2,2 KW - M	413	93	413	3000
4GX - 0,37 KW - T	216	93	216	2000
4GX - 0,55 KW - T	236	93	236	2000
4GX - 0,75 KW - T	266	93	266	2000
4GX - 1,1 KW - T	286	93	286	2000
4GX - 1,5 KW - T	348	93	348	3000
4GX - 2,2 KW - T	393	93	393	3000
4GX - 3,0 KW - T	544	93	544	6000
4GX - 4,0 KW - T	614	93	614	6000
4GX - 5,5 KW - T	684	93	684	6000
4GX - 7,5 KW - T	764	93	764	6000

DAB PUMPS reserves the right to make modifications without notice